

AC Manual Motor Controllers

Without Overload Protection, 40 Amp 600V AC

Features - Specifications

- Silver cadmium oxide contacts
 - Binding screw terminals
 - Tracking resistant urea base
 - Compact design
 - Horsepower rated
 - Nylon toggle
 - Fully enclosed
 - Quick make, slow break mechanism design
 - Available in single or three phase
 - UL Listed File #E70402 – Guide #NLRV
- CSA Certified File #LR46186 – Guide #184-N-13.13A
 - Complies with UL 508
 - NOM
 - 40002 & 40003 UL Listed as Manual Motor Controllers



4002



40002



40003


DOUBLE-POLE

| CAT. NO. | AMP RATING | HP RATING | DESCRIPTION |
|----------|-----------------------------------|--|---|
| 4002 | General purpose 40 Amp 600V AC | 2 HP 120V AC 5 HP 240V AC | Double-pole, single throw, AC manual motor controller without overload protection |
| 40002 | | 2 HP 120V AC 5 HP 240V AC 10 HP 480V AC 15 HP 600V AC | |

THREE-POLE

| CAT. NO. | AMP RATING | HP RATING | DESCRIPTION |
|----------|-----------------------------------|---|--|
| 40003 | General purpose 40 Amp 600V AC | 3 HP 120V AC 7½ HP 240V AC 15 HP 480V AC 20 HP 600V AC | Three-pole, single throw, AC manual motor controller without overload protection |

PRODUCT DIMENSIONS – () Indicates mm dimensions

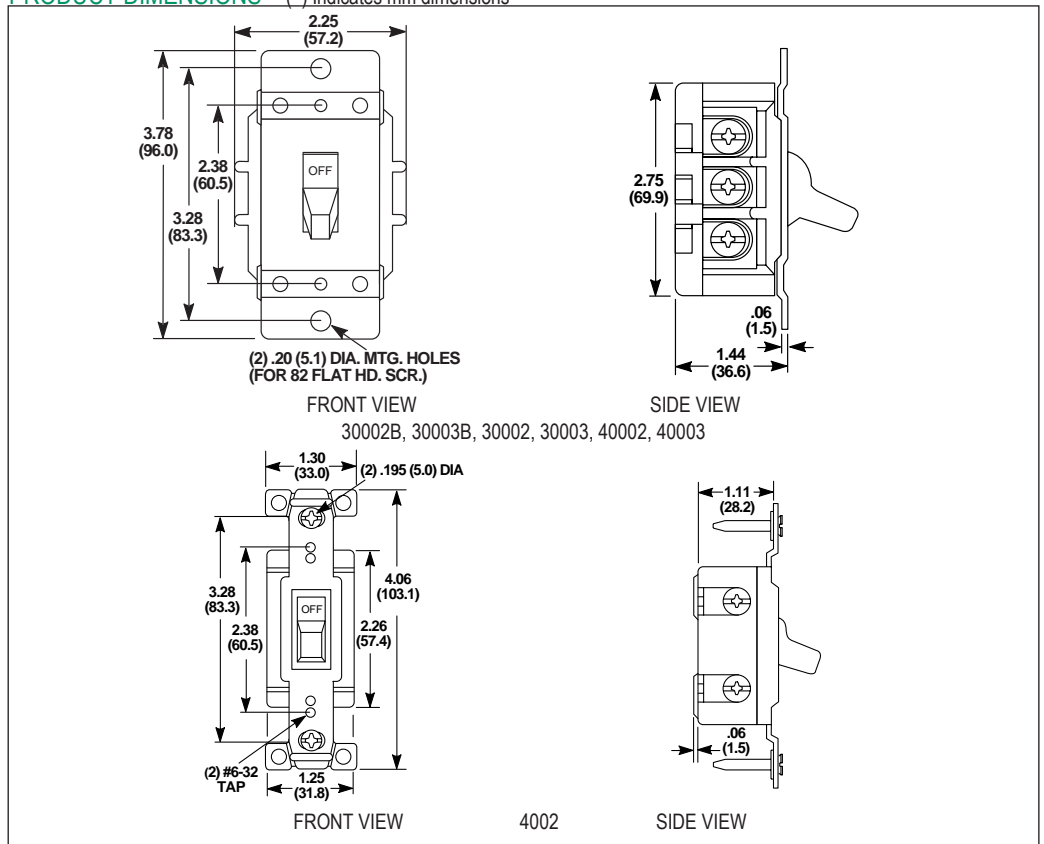

Specifications are subject to change without notice.