

Features - Specifications

- High impact/chemical resistant nylon toggle
- Positive switching action and "center off"
- Silver-alloy contacts
- Extra-wide yoke assures structural integrity, brass and nickel plating to resist corrosion
- Break-off plaster ears
- Color-coded face indicates ampere rating
- Back wiring: clamp-type terminals accept up to #10 wire
- Terminal screws: brass combination Phillips/slotted/Robertson binding head, accepts up to #10 wire
- Grounding connections – green, combination Phillips/ slotted/Robertson hex head screw and automatic ground clip
- Approved for CU wire only
- Thread cleaning captive combination Phillips/slotted/Robertson mounting screws
- Urea insulating safety barrier
- AC – general use snap switches are designed for controlling as permitted by the NEC, resistive, inductive, tungsten-filament, fluorescent and motor loads for AC branch lighting and appliance circuits
- UL Listed File #E1464 – Guide #WMUZ
- CSA Certified File #LR375 – Guide #380-W-19.7
- Complies with UL 20 and NEMA Standard WD-1
- NOM



6006 4822L



4922



3025BRN

THREE-POSITION TWO-CIRCUIT MAINTAINED CONTACT "CENTER OFF"

| CATALOG NUMBER | | | DESCRIPTION |
|--------------------|--------------------|--------------------|--|
| 15 AMP 120-277V AC | 20 AMP 120-277V AC | 30 AMP 120-277V AC | |
| BLUE FACE | RED FACE | GREEN FACE | |
| 4822 | 4922 | — | Single-pole, double throw, center off, brown |
| 4822I | 4922I | — | Single-pole, double throw, center off, ivory |
| — | 4922GRY | — | Single-pole, double throw, center off, gray |
| — | 4922W | — | Single-pole, double throw, center off, white |
| 4822L | — | — | Single-pole, double throw, center off, lock |
| 4825 | 4925 | 3025BRN | Double-pole, double throw, center off, brown |
| 4825I | 4925I | 3025I | Double-pole, double throw, center off, ivory |
| — | 4925L | — | Double-pole, double throw, center off, lock |
| — | 4925W | — | Double-pole, double throw, center off, white |


ACCESSORIES

| CATALOG NUMBER | DESCRIPTION |
|----------------|---------------------------------|
| 6006 | Key supplied with lock switches |

HORSEPOWER RATED

| RATING | 120V | 240V | MAX |
|--------|------|------|--------|
| 15 AMP | ½ HP | 2 HP | 12 AMP |
| 20 AMP | 1 HP | 2 HP | 16 AMP |
| 30 AMP | 2 HP | 2 HP | 20 AMP |

PRODUCT DIMENSIONS – () Indicates mm dimensions

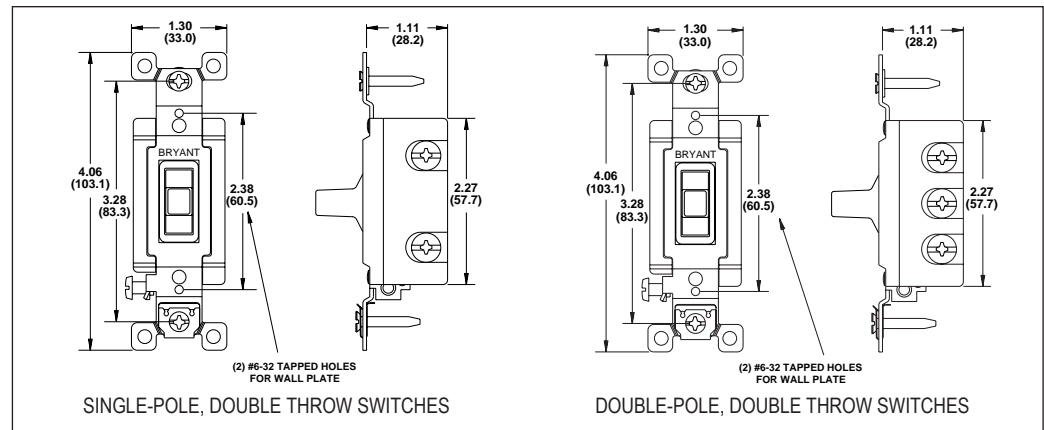

Specifications are subject to change without notice.