

# HUBBELL

## Hubbell Premise Wiring



### SPECIFICATIONS

The innovative design of the QuadCab™ Wall Mount Cabinet provides four distinct advantages:

■ **Quick Installation:**

Cornerstone hinging allows the QuadCab™ Wall Mount Cabinet to be installed quickly in easy to manage segments.

■ **Unmatched Versatility:**

Rear section easily configured for a wide variety of applications using a broad variety of accessories that quickly clip into place.

■ **250 Pound Load Capacity:**

Construction supports loading with minimum sag.

■ **Durability:**

Rugged construction and heavy duty locks and hinges provide long life and a secure environment.


◆ **Material**

- Rear section, top/bottom hinge plates, and front door: 16 ga. CRS
- Center section: 14 ga. CRS
- 19" mounting angles: 11 ga. CRS
- Cornerstone hinges: aluminum permold 4BF
- Depth members: 11 ga. CRS

◆ **Finish:** powder coat black or office white

- ◆ 19" rack mounting width per EIA-310-D
- ◆ 19" rack-style rails tapped #12-24
- ◆ 250 lbs. load capacity
- ◆ Grounding provisions per TIA-607
- ◆ Acrylic window tinted smoke gray
- ◆ 16" stud mounting
- ◆ Front door and rear locks both keyed alike with key #CH751

## ORDER INFORMATION

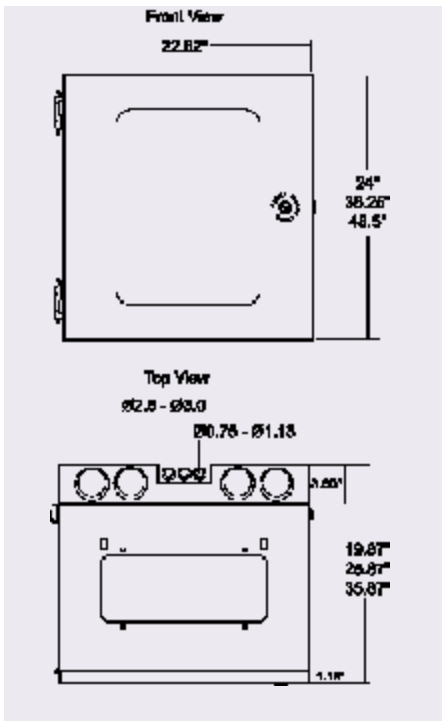

### QuadCab Wall Mount Cabinets

Delivery:	1 Rear section with CH751 lock	1 Front door with CH751 key lock
	1 Center section	2 Top/bottom finger plates
	2 19" mounting angles	2 Cornerstone die-cast hinges

Depth	Door Style	Color*	Catalog No. 24" Height	Catalog No. 36" Height	Catalog No. 48" Height
20"	Window	Black	<b>HW24</b>	<b>HW36</b>	<b>HW48</b>
26"	Window	Black	<b>HW2426</b>	<b>HW3626</b>	<b>HW4826</b>
36"	Window	Black	<b>HW2436</b>	<b>HW3636</b>	<b>HW4836</b>
20"	Solid	Black	<b>HW24S</b>	<b>HW36S</b>	<b>HW48S</b>
26"	Solid	Black	<b>HW24S26</b>	<b>HW36S26</b>	<b>H4W8S26</b>
36"	Solid	Black	<b>HW24S36</b>	<b>HW36S36</b>	<b>HW48S36</b>

To order a QuadCab Wall Mount Cabinet in Office White, add 'W' to the end of the Catalog Number.

### Weight Load vs. Cabinet Deflection

Load	Lbs.	30	45	100	150	200	250
Deflection	In.	0.00	0.06	0.25	0.31	0.50	0.93

**NOTE:** For best results, mount equipment to rack uprights or rest on shelves mounted to rack uprights.

Deflection results shown above are typical, actual deflection may differ based on mounting conditions of cabinet to wall and weight distribution of equipment in cabinet.

## ACCESSORIES

Description	Catalog No.
<b>Lock Kit</b> - Use to change lock style to meet specific applications for both QuadCab and REbox. Delivery: 1 Assembly lock and key.	
Standard kit to replace existing locks	<b>HWKL751</b>
Change key from CH751 to 333	<b>HWKL333</b>
To key cabinet like MCC series front door	<b>HWKLES40</b>
To key cabinet like MCC series rear door	<b>HWKLA126</b>
To convert to Bellcore 716 lock	<b>HWKL716</b>
To convert to European lock	<b>HWKLE</b>

**Replacement Rail Kit** - Use to support rear of deep, active equipment. Delivery: 2 19" Mounting rails, 1 Kit mounting hardware, 20 screws + 20 washers.

Description	Catalog No.	Description	Catalog No.
24"H x M6	<b>HWK24M6</b>	24"H x #12-24	<b>HWK241224</b>
36"H x M6	<b>HWK36M6</b>	36"H x #12-24	<b>HWK361224</b>
48"H x M6	<b>HWK48M6</b>	48"H x #12-24	<b>HWK481224</b>

**Fan Kit** - Increases ventilation. Delivery: 1 Fan tray assembly, wired, 1 Kit mounting hardware.

Description	Catalog No.
200 CFM, 120 VAC, 60 Hz	<b>HWKF120</b>
200 CFM, 230 VAC, 50 Hz	<b>HWKF230</b>

**Fan Filter Kit** - Dust filter for air intake when using fans. Recommended use with gasket kit. Delivery: A/R Brackets, gaskets, framed filters and 1 Kit assembly hardware

Description	Catalog No.
	<b>HWKFF</b>

Description	Catalog No.
<b>Gasket Kit</b> - Use to enhance protection against dust and water, and performance of fan and filter kit. Delivery: 30' Padded grommets	
Catalog No.	<b>HWKGT</b>

### 110/66 Block Mounting Rails

Provides mounting for 110 and 66 blocks. Mounts to rear wall. Delivery: 2 110/66 block mounting rails, 20 #10-24 x 1/2" screws  
Material: 18 ga. cold rolled steel; Finish: Light gray powder coat  
Catalog No. **REK110**

### Bottom-Hinged Patch Panel Mounting Bracket

Use to mount patch panels to rear wall. Provides front access to rear for easy termination. Delivery: 2 brackets, 1 left hand, 1 right hand  
Finish: Light gray powder coat  
Catalog No. **REK19**

### Equipment Mounting Bracket

Provides 19" mounting for hubs and other active equipment to rear wall. Occupies 5 rack units. Delivery: 2 brackets, 1 left hand, 1 right hand. Finish: Light gray powder coat.  
Catalog No. **REKZ**

### Plywood Back Board

Provides universal mounting for wall mounted brackets, blocks, splitters, hubs and other devices. Mounts to rear wall.  
Delivery: 0.75" APA grade AC plywood painted fire-retardant white, 2 mounting brackets, 1 assembly hardware kit

20"H x 19"W	<b>REKBB20</b>
30"H x 19"W	<b>REKBB30</b>
40"H x 19"W	<b>REKBB40</b>



## Hubbell Premise Wiring

HUBBELL INCORPORATED (Delaware)

14 Lord's Hill Road • Stonington, CT 06378-0901 • (860) 535-8326 • 800-626-0005  
Fax: (860) 535-8328 • Internet site: <http://www.hubbell-premise.com>

### Worldwide Locations

Hubbell Premise Wiring, Asia Pacific	852-2836-7131	Fax: 852-2836-7132	Hubbell de Mexico, S.A. de C.V.	52-5-559-5304	Fax: 52-5-559-5885
Hubbell Canada Inc.	905-839-1138	Fax: 905-839-9108	Hubbell Premise Wiring, Middle East	971-4-393-4192	Fax: 971-4-393-4194
Hubbell Premise Wiring, China	86-21-6217-3478	Fax: 86-21-6217-3481	Hubbell Premise Wiring, Puerto Rico	787-720-7185	Fax: 787-789-2796
Hubbell Premise Wiring, Europe	44-(0)1234-848550	Fax: 44-(0)1234-856190	Hubbell-Taian Co., Ltd., Taiwan	886-2-(0)2515-0855	Fax: 886-2-(0)2515-0899
Hubbell Int'l. Inc., Korea Branch	82-2-(0)2607-1363	Fax: 82-2-(0)2603-7386	Hubbell Incorporated, Turkey	90-216-414-8147	Fax: 90-216-414-8148
Hubbell Premise Wiring, Latin America	305-251-4236	Fax: 305-251-4087	Hubbell Premise Wiring, Venezuela	58-16-6807453	Fax: 58-281-2820323

DS-M20 03/02