



FF
Female/Female



MF
Male/Female



GUFS



MM
Male/Male



BL
Male/Female



Y



EYMF

Class I, Div. 1 & 2, Groups C,D
Class II, Div. 1 & 2, Groups E,F,G
Class III



Listed - File E10514



Certified - File LR11716



File 25215

APPROVED

See files for details or call Killark.

FEATURES-SPECIFICATIONS

Applications

- Elbows: To change direction in rigid or IMC conduit systems
- Capped Elbows: To change direction 90° in rigid or IMC conduit systems where space is limited and access is needed for pulling conductors or maintenance
- Swivel Elbows: Allows conduit to be joined at angles ranging between 90° to 180°. A screwdriver is the only tool needed
- 90° Plugged Elbows: To change direction 90° in rigid or IMC conduit systems where space is limited and access is needed for pulling conductors or maintenance

Features



- Threaded for rigid conduit or IMC
- Smooth integral bushings to prevent damage to wires

Material/Finish

Copper-free Aluminum
(less than 4/10 of 1%)

- Electrostatically applied powder coating

Iron Zinc electro-plate

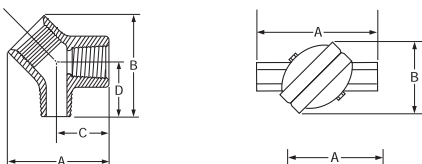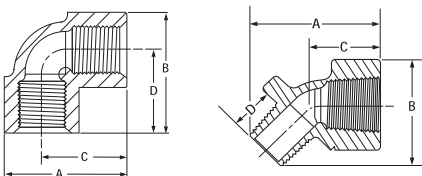

KILLARK®

ELBOWS							
CATALOG NUMBER		HUB SIZE	TYPE	A	B	C	D
ALUMINUM	IRON						
FF-90-1Ⓛ	FF-90-1MⓄ	1/2"	FF 90°	2"	2"	1-3/8"	1-3/8"
FF-90-2Ⓛ	FF-90-2MⓄ	3/4"	FF 90°	2-1/4"	2-1/4"	1-1/2"	1-1/2"
FF-90-3Ⓛ	FF-90-3MⓄ	1"	FF 90°	2-15/16"	2-15/16"	2"	2"
FF-45-1Ⓛ	FF-45-1MⓄ	1/2"	FF 45°	2-3/8"	2"	1-1/8"	—
FF-45-2Ⓛ	FF-45-2MⓄ	3/4"	FF 45°	2-11/16"	2-3/16"	1-1/4"	—
FF-45-3Ⓛ	FF-45-3MⓄ	1"	FF 45°	3-3/8"	2-11/16"	1-5/8"	—
FF-45-6Ⓛ	FF-45-6MⓄ	2"	FF 45°	4-3/4"	3-7/8"	2-1/4"	—
FF-45-8Ⓛ	FF-45-8MⓄ	3"	FF 45°	5-1/4"	5-17/64"	2-17/64"	—
MF-90-1Ⓛ	MF-90-1MⓄ	1/2"	MF 90°	11/16"	2"	1-3/8"	1-3/8"
MF-90-2Ⓛ	MF-90-2MⓄ	3/4"	MF 90°	7/8"	2-7/16"	1-1/2"	1-11/16"
MF-45-1Ⓛ	MF-45-1MⓄ	1/2"	MF 90°	2-1/8"	1-3/4"	1-1/8"	3/4"
MF-45-2Ⓛ	MF-45-2MⓄ	3/4"	MF 90°	2-3/8"	1-7/8"	1-9/32"	3/4"
MM-90-1Ⓛ	MM-90-1MⓄ	1/2"	MM 90°	2-1/16"	2-1/16"	1-3/8"	1-3/8"
MM-90-2Ⓛ	MM-90-2MⓄ	3/4"	MM 90°	2-1/4"	2-1/4"	1-1/2"	1-1/2"
BL-90-1Ⓛ	BL-90-1MⓄ	1/2"	BL 90°	2-1/4"	2-3/8"	1-7/8"	1-3/4"
BL-90-2Ⓛ	BL-90-2MⓄ	3/4"	BL 90°	2-5/8"	3"	2-1/8"	2-1/4"
BL-90-3Ⓛ	BL-90-3MⓄ	1"	BL 90°	2-1/4"	3-7/16"	2-5/8"	2-1/2"

CAPPED ELBOWS							
CATALOG NUMBER		HUB SIZE	TYPE	A	B	C	D
ALUMINUM	IRON						
Y-1Ⓛ	Y-1MⓄ	1/2"	90°	2-7/8"	2-3/4"	1-7/8"	—
Y-2Ⓛ	Y-2MⓄ	3/4"	90°	3-1/16"	3-3/4"	2-1/8"	—
Y-3Ⓛ	Y-3MⓄ	1"	90°	4"	3-1/4"	2-5/8"	—
Y-4Ⓛ	Y-4MⓄ	1-1/4"	90°	5-1/16"	4-1/8"	3-7/8"	—
Y-5Ⓛ	Y-5MⓄ	1-1/2"	90°	5-1/16"	4-1/4"	3-7/8"	—

SWIVEL ELBOWS							
CATALOG NUMBER		HUB SIZE	TYPE	A	B	C	D
ALUMINUM	IRON						
GUFS-1Ⓛ	GUFS-1MⓄ	1/2"	180°	4-1/2"	2-1/4"	—	—
GUFS-2Ⓛ	GUFS-2MⓄ	3/4"	180°	4-1/2"	2-1/4"	—	—
GUMFS-1Ⓛ	GUMFS-1MⓄ	1/2"	180°	5-1/8"	2-1/4"	—	—
GUMFS-2Ⓛ	GUMFS-2MⓄ	3/4"	180°	5-1/4"	2-1/4"	—	—

90° PLUGGED ELBOWS							
CATALOG NUMBER		HUB SIZE	TYPE	A	B	C	D
ALUMINUM	IRON						
EYMF-1Ⓛ	—	1/2"	90°	2-5/8"	2-5/8"	1-3/8"	1-3/8"
EYMF-2Ⓛ	—	3/4"	90°	2-3/4"	2-3/4"	1-1/2"	1-1/2"

Ⓛ Copper-free aluminum - Electrostatically applied powder coating

Ⓞ Aluminum - Natural finish

Ⓞ Iron - Zinc electroplate

Ⓞ Iron - Duraloy finish

Ⓞ Furnished with 1" close-up plug in top.