

## SURFACE MOUNT BOXES 4" SQUARE, 4-11/16" SQUARE, HANDY BOXES

COMING SOON

### Applications


- RACO Surface Mount Boxes are specifically designed for exposed work, flush mount applications where an alternative to conduit grounding is required
- Boxes are installed on walls or ceilings to support lighting fixtures, switches or receptacles
- Square boxes are used where multiple conductor runs are split into two or more directions to bring power to a number of electrical devices
- Handy boxes are used to house wiring devices such as switches or outlets and as small junction boxes

### Product Features

- Raised ground screw emboss on bottom of box eliminates ground screw/surface interference when mounted on flat surface
- All RACO Surface Mount Boxes include a pre-assembled 3-way ground screw and 8" long, #12 stranded pigtail saving both time and labor for the installer

### Compliance

-  – File E195978

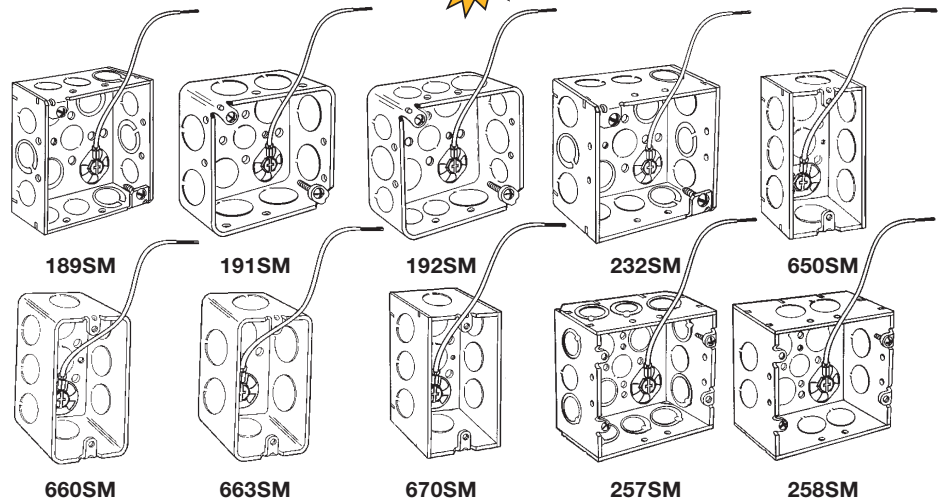

### ORDERING INFORMATION - DIMENSIONS

MASONRY BOXES – 2-1/2" DEEP – NONGANGABLE WITH CONDUIT KO'S							
CATALOG NUMBER	DESCRIPTION	DEPTH	KNOCKOUTS		CU. IN.	STD. PKG.	UPC BAR CODE
			SIDES COND.	BOTTOM COND.			
189SM	Welded	1-1/2"	8-1/2", 4-TKO	2-1/2", 2-TKO	21.0	50	
191SM	Drawn	1-1/2"	8-3/4"	1-1/2", 3-3/4"	21.0	50	
192SM	Drawn	1-1/2"	8-1/2", 4-TKO	2-1/2", 2-3/4"	21.0	50	
232SM	Welded	2-1/3"	8-1/2", 4-TKO	2-1/2", 2-TKO	30.3	25	

4" X 2" SURFACE MOUNT HANDY BOXES WITH CONDUIT KO'S								
CATALOG NUMBER	DESCRIPTION	DEPTH	KNOCKOUTS			CU. IN.	STD. PKG.	UPC BAR CODE
			SIDES COND.	ENDS COND.	BOTTOM COND.			
650SM	Welded	1-1/2"	6-1/2"	2-1/2"	2-1/2"	11.5	50	
660SM	Drawn	1-7/8"	6-1/2"	2-1/2"	2-1/2"	13.0	50	
663SM	Drawn	1-7/8"	4-3/4"	2-3/4"	1-3/4"	13.0	50	
670SM	Welded	2-1/8"	6-1/2"	2-1/2"	2-1/2"	16.5	50	

4-11/16" SQUARE SURFACE MOUNT BOXES WITH CONDUIT KO'S							
CATALOG NUMBER	DESCRIPTION	DEPTH	KNOCKOUTS		CU. IN.	STD. PKG.	UPC BAR CODE
			SIDES COND.	BOTTOM COND.			
189SM	Welded	1-1/2"	8-1/2", 4-TKO	2-1/2", 2-TKO	21.0	50	
257SM	Welded	2-1/8"	2-1/2", 10-TKO	1-1/2", 1-3/4" 2-TKO	42.0	25	
258SM	Welded	2-1/8"	8-1"	2-1/2", 2-3/4"	42.0	25	