

**OCTAGON BOXES**  
**1-1/2" DEEP**

**Applications**


- Octagon boxes can be used in the installation of ceiling or wall lighting fixtures
- Extension rings provide a means for adding additional cubic capacity or as an outlet box for surface conduit

**Product Features**

- Combination screw heads provide for faster installation
- RACO® offers a variety of labor saving mounting brackets that allow for easy positioning of box along studs or joists
- See Box Selection section in the front of this catalog for complete description of bracket types and features

**Compliance**

-  – File E195978

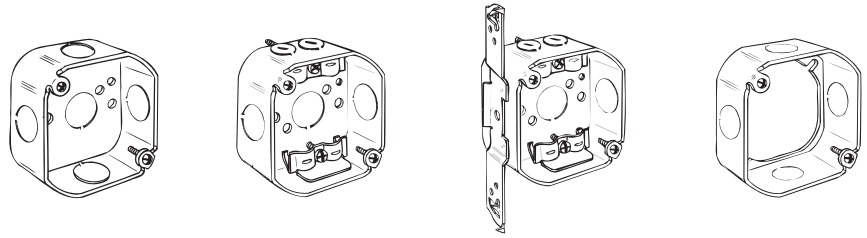


110

112


119

111


**ORDERING INFORMATION - DIMENSIONS**

3-1/2" OCTAGON BOX - 1-1/2" DEEP - DRAWN WITH CONDUIT KO'S - 11.8 CUBIC INCHES							
CATALOG NUMBER	DESCRIPTION BRACKET & SETBACK	KNOCKOUTS		STD. PKG.	UPC BAR CODE	MAX. RECOMMENDED SUPPORT LOADS	
		SIDES COND.	BOTTOM COND.			CEILING FAN (DYNAMIC) LBS.	FIXTURE (STATIC) LBS.
110	—	4-1/2"	1-1/2"	50		No	50

3-1/2" OCTAGON BOX - 1-1/2" DEEP - DRAWN WITH NONMETALLIC SHEATHED CABLE CLAMPS- 11.8 CUBIC INCHES								
CATALOG NUMBER	DESCRIPTION BRACKET & SETBACK	KNOCKOUTS			STD. PKG.	UPC BAR CODE	MAX. RECOMMENDED SUPPORT LOADS	
		SIDES		BOTTOM			CEILING FAN (DYNAMIC) LBS.	FIXTURE (STATIC) LBS.
		CABLE	COND.	COND.				
112	—	4	2-1/2"	1-1/2"	50	—	No	50
119	TS brkt., 1/2"	4	1-1/2"	1-1/2"	25	—	No	50

3-1/2" OCTAGON EXTENSION RING - 1-1/2" DEEP - DRAWN WITH CONDUIT KO'S - 11.8 CUBIC INCHES					
CATALOG NUMBER	DESCRIPTION BRACKET & SETBACK	KNOCKOUTS		STD. PKG.	UPC BAR CODE
		SIDES COND.	BOTTOM COND.		
111	Extension ring	4-1/2"	—	25	

3-1/2" OCTAGON BOXES

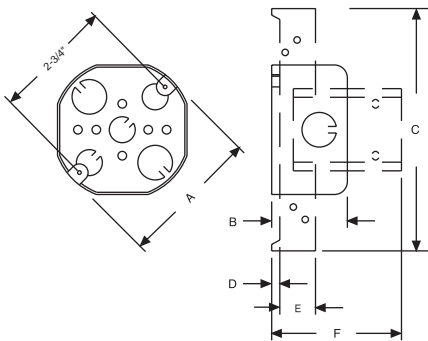

DIMENSIONS					
CATALOG NUMBER	A	B	C	D	E
110	3-7/16"	1-9/16"	—	—	—
112	3-7/16"	1-9/16"	—	—	—
119	3-7/16"	1-9/16"	7-5/32"	1/2"	1-1/4"
111	3-7/16"	1-9/16"	—	—	—