



Applications


- Handy Boxes, also called utility boxes, are used for convenience outlets, switch boxes or small junction boxes
- They are popular for exposed work applications (surface mounted wiring)
- The NEC requires that surface-mounted wiring be enclosed with a protective covering such as EMT conduit


Product Features

- RACO® offers a variety of labor saving mounting brackets that allow for easy positioning of box along studs or joists
- See Box Selection section in the front of this catalog for complete description of bracket types and features


Compliances

-  – File E195978
-  – File LR-1082 (611 only)


 All RACO® single gang, two gang, 4" square, and single gang gangable U.L. listed steel boxes are acceptable for use in 2-hour fire rated walls. For additional information, consult U.L. "Fire Resistance Directory" or the U.L. website at www.ul.com



650, 8650




655




660, 8660




611



663, 8663



662




661

ORDERING INFORMATION - DIMENSIONS

4" x 2" HANDY BOXES - 1-1/2" DEEP - WELDED WITH CONDUIT KO'S - 11.5 CUBIC INCHES						
CATALOG NUMBER	DESCRIPTION BRACKET & SETBACK	KNOCKOUTS			STD. PKG.	UPC BAR CODE
		SIDES	ENDS	BOTTOM		
650	—	6-1/2"	2-1/2"	3-1/2"	50	—
8650	—	6-1/2"	2-1/2"	3-1/2"	50	
655	B brkt., 1/4"	3-1/2"	2-1/2"	3-1/2"	50	—

4" x 2" HANDY BOXES - 1-7/8" DEEP - DRAWN WITH CONDUIT KO'S - 13.0 CUBIC INCHES						
CATALOG NUMBER	DESCRIPTION BRACKET & SETBACK	KNOCKOUTS			STD. PKG.	UPC BAR CODE
		SIDES	ENDS	BOTTOM		
660	—	6-1/2"	2-1/2"	3-1/2"	50	—
8660	—	6-1/2"	2-1/2"	3-1/2"	50	
611	Ground screw incl.	6-1/2"	2-1/2"	3-1/2"	50	—
663	—	4-3/4"	2-3/4"	2-3/4"	50	—
8663	—	4-3/4"	2-3/4"	2-3/4"	50	
662	TS brkt., 1/2"	3-1/2"	2-1/2"	3-1/2"	50	
661	A brkt., 5/8"	3-1/2"	2-1/2"	3-1/2"	50	

STEEL HANDY BOXES

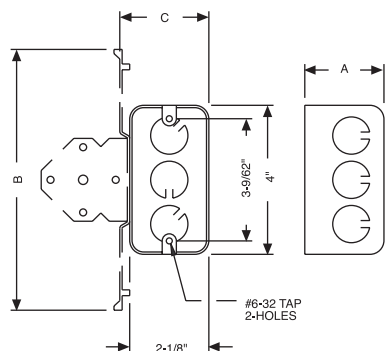

DIMENSIONS			
CATALOG NUMBER	A	B	C
650, 8650	1-1/2"	—	—
655	1-1/2"	—	—
660, 8660	1-7/8"	—	—
611	1-7/8"	—	—
663, 8663	1-7/8"	—	—
662	1-7/8"	7"	2-3/8"
661	1-7/8"	6-7/16"	2-11/32"